



Wood & Pellet Products

Pocket
01_2023 EN

PRESTIGE
Line

Evolution
line

INDEX



Wood

STOVES	2
COOKER	9
FIREPLACE	11

Pellet

VENTILATED STOVES	13
DUCTED STOVES	23
HEATING STOVES	30



Pellet stoves

VENTILATED STOVES	32
DUCTED STOVES	39
HEATING STOVES	42

Pellet boilers

BOILERS	50
---------------	----

TECHNOLOGY	55
------------------	----

GENERAL PRODUCTS TABLE OF CONTENTS	56
---	----

CERTIFICATES	58
--------------------	----

NOTE	61
ENERGY LABEL	61
LEGEND	61

Trademark and copyright:

All brands, pictures, information and photos, products, advertisements and all other features displayed in this catalogue are the exclusive property of La Nordica S.p.A. / Extraflame S.p.A.

W
O
O
D

PRESTIGE

Line

PERFECT SYMBIOSIS

OF DESIGN

AND WARMTH

LIÙ - PIETRA

Wood burning stove

PRESTIGE

Line

A⁺ | 7,5 kW-N | 215 m³

CHARACTERISTICS



TECHNICAL DATA

Nominal power
7,5 kW-N

Efficiency
86,5 %

Hourly consumption
2,0 kg/h

Dimensions (LxHxD)
528 x 1107 x 508 mm

Net weight
201 kg

Fumes flue diameter (Ø)
130 mm T

Hearth opening size (LxH)
270 x 375 mm

Hearth dimensions (LxHxD)
295 x 420 x 310 mm

Wood length (max)
30 cm

TECHNOLOGY



ECODESIGN

Download
Technical Sheet



SCAN ME



COLOUR CHOICES

Finish in natural stone carved from a single block



Natural stone



Internal facing of the hearth in cast iron and Nordiker

N.B. Enameled cast iron, when used correctly, has almost an unlimited life and requires minimal maintenance.

TAHITI

Cast iron wood burning stove

PRESTIGE

Line

A⁺ | 7,7 kW-N | 220 m³

CHARACTERISTICS



TECHNICAL DATA

Nominal power
7,7 kW-N

Efficiency
81,8 %

Hourly consumption
2,2 kg/h

Dimensions (LxHxD)
746 x 894 x 483 mm

Net weight
150 kg

Fumes flue diameter (Ø)
150 mm T

Hearth opening size (LxH)
532 x 212 mm

Hearth dimensions (LxHxD)
585 x 290 x 255 mm

Wood length (max)
50 cm

TECHNOLOGY



ECODESIGN

Download
Technical Sheet



SCAN ME



COLOUR CHOICES

Finish entirely in enamelled cast iron



Anthracite black



Front and side loading door

TAHITI EPS

Wood stove with heat recovery system

PRESTIGE

Line

A⁺ | 8,0 kW-N | 229 m³

CHARACTERISTICS



TECHNICAL DATA

Nominal power
8,0 kW-N

Efficiency
87,6 %

Hourly consumption
2,2 kg/h

Dimensions (LxHxD)
746 x 1373 x 483 mm

Net weight
154 kg

Fumes flue diameter (Ø)
150 mm T

Hearth opening size (LxH)
532 x 212 mm

Hearth dimensions (LxHxD)
585 x 290 x 255 mm

Wood length (max)
50 cm

TECHNOLOGY



ECODESIGN

Download
Technical Sheet



SCAN ME



COLOUR CHOICES

Finish entirely in enamelled cast iron



Anthracite black

STANDARD EQUIPMENT - TAHITI EPS



EPS System
Model with heat recovery system



Front and side loading door

N.B. Enameled cast iron, when used correctly, has almost an unlimited life and requires minimal maintenance.

DANTE


Wood stove with heat recovery system

PRESTIGE

Line

A⁺ | 8,8 kW-N | 252 m³

CHARACTERISTICS

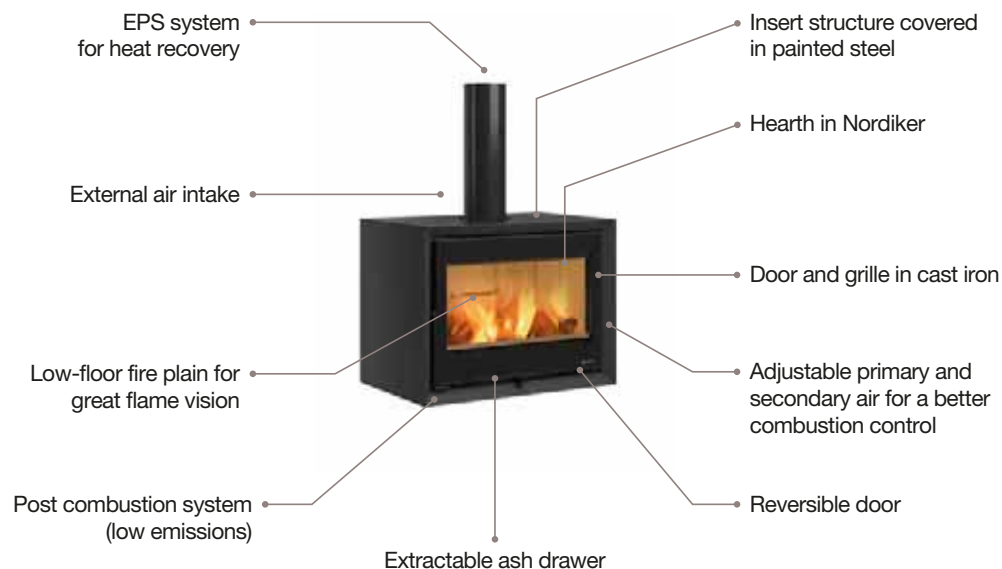

TECHNICAL DATA

Nominal power
8,8 kW-N

Efficiency
85,5 %

Hourly consumption
2,4 kg/h

Dimensions (LxHxD)
822 x 1055 x 550 mm

Net weight
158 kg

Fumes flue diameter (Ø)
160 mm T

Hearth opening size (LxH)
626 x 278 mm

Hearth dimensions (LxHxD)
652 x 295 x 350 mm

Wood length (max)
30 cm

TECHNOLOGY



ECODESIGN

Download
Technical Sheet



SCAN ME



COLOUR CHOICES

High temperature painted steel covering - Matte black

DANTE WITH BENCH (optional element)
Examples of combinations



Dimensions with bench (LxHxD)

1490 x 1525 x 540 mm

STANDARD EQUIPMENT



EPS System
Model with heat recovery system

OPTIONAL



Bench Matte black
LxHxD 1490x470x540 mm
53,5 Kg

DANTE CON PORTALEGNA

Wood stove with heat recovery system

PRESTIGE

Line

A⁺ | 8,8 kW-N | 252 m³

CHARACTERISTICS



TECHNICAL DATA

Nominal power
8,8 kW-N

Efficiency
85,5 %

Hourly consumption
2,4 kg/h

Dimensions (LxHxD)
822 x 1480 x 553 mm

Net weight
183 kg

Fumes flue diameter (Ø)
160 mm T

Hearth opening size (LxH)
626 x 278 mm

Hearth dimensions (LxHxD)
652 x 295 x 350 mm

Wood length (max)
30 cm

TECHNOLOGY



ECODESIGN



COLOUR CHOICES

High temperature painted steel covering - Matte black



Download
Technical Sheet



SCAN ME

STANDARD EQUIPMENT



EPS System
Model with heat recovery system

NOVA FORNO

Wood stove with oven

PRESTIGE

Line

A⁺ | 11,8 kW-N | 338 m³

CHARACTERISTICS



TECHNICAL DATA

Nominal power (min. - max.)

11,8 kW-N

Efficiency

86,4 %

Hourly consumption

3,2 kg/h

Dimensions (WxHxD)

559 x 1496 x 569 mm

Net weight

256 kg

Smoke outlet diameter (Ø)

150 mm U

Hearth opening size (WxH)

315 x 285 mm

Hearth size (WxHxD)

357 x 450 x 362 mm

Oven size (WxHxD)

330 x 300 x 370 mm

Wood, max. length

30 cm

TECHNOLOGY



Nordiker hearth



Post combustion



Cast iron doors



Glass cleaning system



Direct external air inlet (BBC)

ECODESIGN

Download
technical data sheet



SCAN ME



FINISHES

Majolica cladding



Matt white



Burgundy

STANDARD EQUIPMENT



ENAMELLED OVEN PAN (1 piece)



CHROME PLATED OVEN GRILL (1 piece)

NOVA FORNO - STEEL

Wood stove with oven

PRESTIGE

Line

New 2023

A⁺ | **11,8** kW-N** | **338** m³**

ECODESIGN**

Download
technical data sheet



SCAN ME

CHARACTERISTICS



TECHNICAL DATA

Nominal power (min. - max.)

11,8 kW-N **

Efficiency

86,4 % **

Hourly consumption

3,2 kg/h **

Dimensions (WxHxD)

559 x 1496 x 569 mm **

Net weight

217 kg **

Smoke outlet diameter (Ø)

150 mm U **

Hearth opening size (WxH)

315 x 285 mm **

Hearth size (WxHxD)

357 x 450 x 362 mm **

Oven size (WxHxD)

330 x 300 x 370 mm **

Wood, max. length

30 cm **

TECHNOLOGY



Nordiker hearth



Post combustion



Cast iron doors



Glass cleaning system



Direct external air inlet (BBC)

FINISHES

Enamelled external steel



Anthracite black



Panna

STANDARD EQUIPMENT



ENAMELLED OVEN PAN (1 piece)



CHROME PLATED OVEN GRILL (1 piece)

A⁺ | 8,7 kW-N | 249 m³

CHARACTERISTICS



TECHNICAL DATA

Nominal power (min-max)
8,7 kW-N

Efficiency
89,1 %

Hourly consumption
2,3 kg/h

Dimensions (LxHxD)
1050 x 865 x 670 mm
(without food warmer)

Net weight
217 kg
(without food warmer)

Fumes flue diameter (Ø)
150 mm B/T

Hearth opening size (LxH)
240 x 185 mm

Hearth dimensions (LxHxD)
270 x 287 x 455 mm

Dimensione Forno (LxHxD)
436 x 418 x 430 mm

Wood length (max)
30 cm

TECHNOLOGY



ECODESIGN

Download
Technical Sheet



SCAN ME



COLOUR CHOICES

Finish in enamelled steel and majolica



Bordeaux

White Infinity

STANDARD EQUIPMENT



ENAMELLED BACKING TRAY (1 piece)



OVEN GRID (1 piece)

OPTIONAL



FOOD WARMER

Bordeaux - White Infinity
Dimensions (LxHxD) 987x710x370mm
Attention: pipe not included

ALASKA

Wood-burning cooker

PRESTIGE

Line

A⁺ | 12,0 kW-N | 344 m³

CHARACTERISTICS



TECHNICAL DATA

Nominal power (min. - max.)

12,0 kW-N

Efficiency

88,6 %

Hourly consumption

3,2 kg/h

Dimensions (WxHxD)

1307 x 860 x 705 mm

Net weight

350 kg

Smoke outlet diameter (Ø)

150 mm R/U

Hearth opening size (WxH)

405 x 278 mm

Hearth size (WxHxD)

400 x 340 x 460 mm

Oven size (WxHxD)

434 x 418 x 430 mm

Wood, max. length

30 cm

TECHNOLOGY



Nordiker®



Post combustion



Cast iron doors



Glass cleaning system



Direct external air inlet (BBC)

ECODESIGN

Download
technical data sheet



SCAN ME




FINISHES

Cast iron and enamelled steel cladding



Glazed black



Three-ring plate

STANDARD EQUIPMENT



ENAMELLED OVEN PAN (1 piece)



STAINLESS STEEL GRILL (1 piece)



CHROME PLATED OVEN GRILL (1 piece)

OPTIONAL



CHROME PLATED HANDRAIL AND TERMINALS


MONOBLOCCO 90PA

Wood-burning monoblock for fireplaces

PRESTIGE
Line

A⁺ | 13,2 kW-N | 378 m³

CHARACTERISTICS

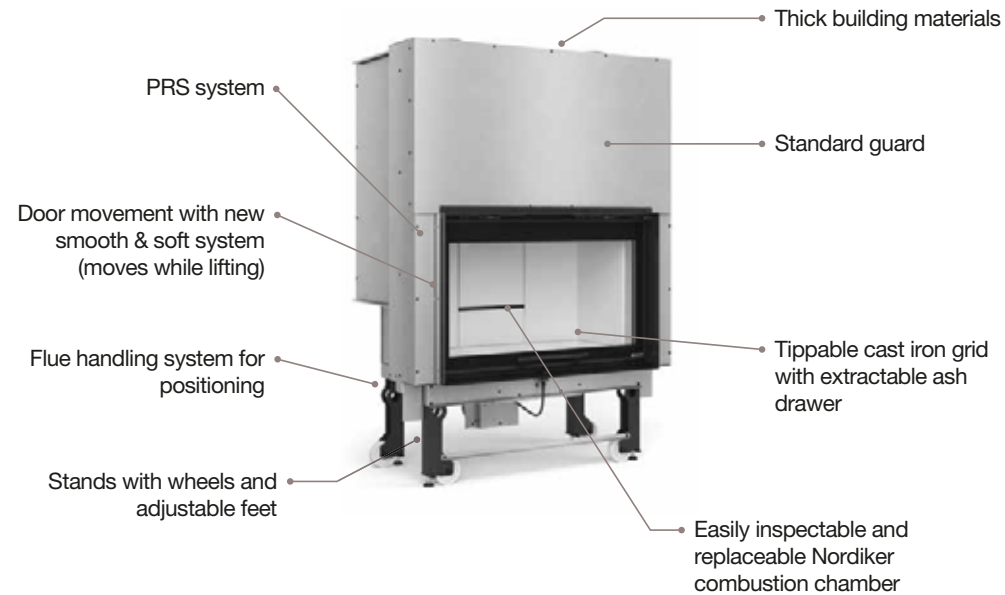

TECHNICAL DATA

Nominal power
13,2 kW-N

Efficiency
86,5 %

Hourly consumption
3,6 kg/h

Dimensions (WxHxD)
1105 x 1590-1630 x 650 mm

Net weight
320 kg


Smoke outlet diameter (Ø)
180 mm

Hearth opening size (WxH)
830 x 350 mm

Hearth size (WxHxD)
815 x 480 x 325 mm

Wood, max. length
50 cm

TECHNOLOGY



ECODESIGN

Download
technical data sheet



SCAN ME



FINISHES



OPTIONAL



Stainless steel frame kit



"Wind Air" Kit



Shade diffuser



Wave diffuser

PRESTIGE

Line

PERFECT SYMBIOSIS

OF DESIGN

AND WARMTH

New 2023

A⁺ | 7,0** kW-N | 201** m³

CHARACTERISTICS

- Output smoke outlet possibilities: rear, upper
- Radiant surface heat exchanger
- Extractable burn pot for easy cleaning
- Easy Control
- Easy Setup



ECODESIGN**

Download
Technical Sheet



SCAN ME



TECHNICAL DATA

Nominal power (min-max)
2,5 - 7,0 kW-N**

Efficiency (min-max)
94,3 - 90,4 %**

Hourly consumption (min-max)
0,6 - 1,6 kg/h**

Dimensions (LxHxD)
478 x 914 x 522 mm**


Net weight
86 kg**

Fumes flue diameter (Ø)
80 mm U/R **

Tank total capacity
~11 kg / ~18 l

Power absorption (min-max)
30 - 60 W**

TECHNOLOGY

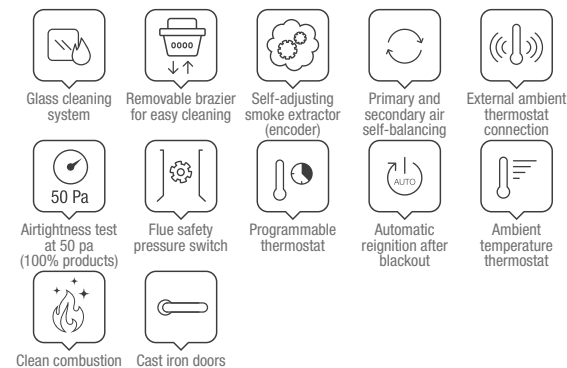

COLOUR CHOICES

High temperature painted steel covering



Black

STANDARD EQUIPMENT



REMOTE CONTROL
Backlit IR touch remote control



BLACK LCD

A⁺ | **7,0 kW-N** | **201 m³**

CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Radiant surface heat exchanger
- Ergonomic handle
- Extractable burn pot for easy cleaning

ECODESIGN

Download
Technical Sheet



SCAN ME



TECHNICAL DATA

Nominal power (min-max)

2,5 - 7,0 kW-N

Efficiency (min-max)

92,2 - 90,9 %

Hourly consumption (min-max)

0,6 - 1,6 kg/h

Dimensions (LxHxD)

456 x 924 x 555 mm

Net weight

86 kg

Fumes flue diameter (Ø)

80 mm B


Tank total capacity

~15 kg / ~24 ℓ

Power absorption (min-max)

30 - 60 W

TECHNOLOGY

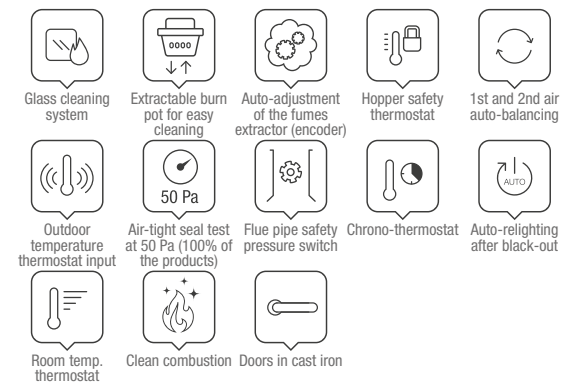

COLOUR CHOICES

High temperature painted steel covering



Ivory

Black

Bronze

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR touch remote control



BLACK LCD

MOIRA EVO



Airtight, ventilated pellet stove

PRESTIGE

Line

A⁺ | 7,0 kW-N | 200 m³

CHARACTERISTICS

Radiant surface
heat exchanger

Upper room
ventilation with
dedicated motor,
excludable

Extractable Ash
compartment

Hearth, door fire
and brazier in
cast iron



- Output smoke outlet possibilities:
rear
- Emergency module
- Extractable burn pot for easy
cleaning

ECODESIGN



Download
Technical Sheet



SCAN ME

TECHNICAL DATA

Nominal power (min-max)

2,5 - 7,0 kW-N

Efficiency (min-max)

94,3 - 90,4 %

Hourly consumption (min-max)

0,6 - 1,6 kg/h

Dimensions (LxHxD)

463 x 893 x 528 mm

Net weight

84 kg

Fumes flue diameter (Ø)

80 mm B

Tank total capacity

~11 kg / ~18 l

Power absorption (min-max)

30 - 60 W

TECHNOLOGY



Glass cleaning
system



Extractable burn
pot for easy
cleaning



Auto-adjustment
of the fumes
extractor (encoder)



1st and 2nd air
auto-balancing



Outdoor
temperature
thermostat input



Air-tight seal test
at 50 Pa (100% of
the products)



Flue pipe safety
pressure switch



Chrono-thermostat



Auto-relighting
after black-out



Room temp.
thermostat



Clean combustion



Doors in cast iron

COLOUR CHOICES

High temperature painted steel covering and
majolica top cover



White



Black

STANDARD EQUIPMENT

REMOTE CONTROL

Control with
radio-controlled
“hand-held” device, with
thermostat function



A⁺ | 7,0 kW-N | 201 m³

CHARACTERISTICS



- Smoke discharge outlet option: rear
- Removable brazier for easy cleaning
- Removable ash compartment
- Room temperature control with AUTOMATIC function
- Home automation integration with "Alexa"
- Easy Control
- Self Control
- Easy Setup



Tab for opening the door

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

2,5 - 7,0 kW-N

Efficiency (min. - max.)

94,3 - 90,4 %

Hourly consumption (min. - max.)

0,6 - 1,6 kg/h

Dimensions (WxHxD)

506 x 886 x 560 mm

Net weight

91 kg

Smoke outlet diameter (Ø)

80 mm R


Total tank capacity

~11 kg / ~18 l

Electric consumption (min. - max.)

26 - 58 W

TECHNOLOGY

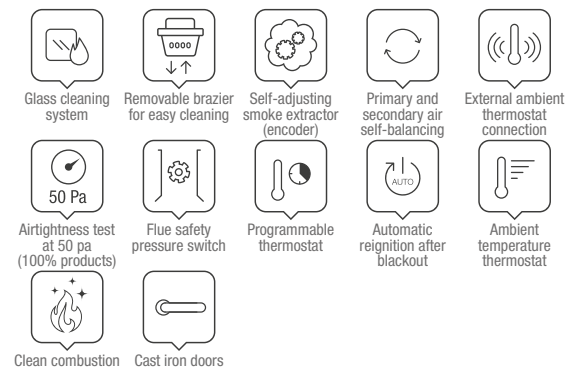

FINISHES

Painted steel two-tone cladding



White



Bronze



Black

STANDARD EQUIPMENT

REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function



DISPLAY WITH BUILT-IN WI-FI

("Total Control 3.0" app)



A⁺ | 8,0 kW-N | 230 m³

CHARACTERISTICS



- Smoke discharge outlet option: rear, upper
- New “5-star” brazier + EGR
- Radiant surface heat exchanger
- Removable ash compartment
- Home automation integration with “Alexa” (Amazon). N.B. only with “Grey label” WiFi module – optional – and using the App Total Control 3.0. Service and “Alexa” device (Amazon) not included
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Easy Control
- Self Control
- Easy Setup

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

3,2 - 8,0 kW-N

Efficiency (min. - max.)

92,4 - 91,1 %

Hourly consumption (min. - max.)

0,7 - 1,8 kg/h

Dimensions (WxHxD)

496 x 1014 x 585 mm

Net weight

104 kg

Smoke outlet diameter (Ø)

80 mm U/R


Total tank capacity

~15 kg / ~24 ℓ

Electric consumption (min. - max.)

30 - 60 W

TECHNOLOGY

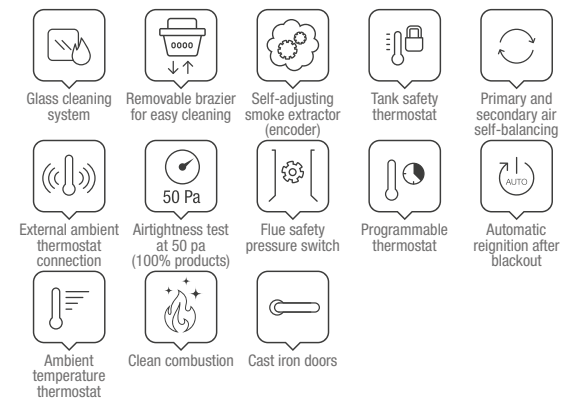

FINISHES

Black painted steel cladding and ceramic or stone front panel



Black

Tortora

Natural stone

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR Touch remote control



BLACK LCD

A⁺ | 8,0 kW-N | 230 m³

CHARACTERISTICS



- Removable brazier for easy cleaning
- Removable ash compartment
- Room temperature control with AUTOMATIC function
- Home automation integration with "Alexa"
- Easy Setup
- Easy Control
- Self Control



Thick top

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

2,5 - 8,0 kW-N

Efficiency (min. - max.)

94,7 - 91,5 %

Hourly consumption (min. - max.)

0,5 - 1,8 kg/h

Dimensions (WxHxD)

507 x 1007 x 558 mm

Net weight

101 kg

Smoke outlet diameter (Ø)

80 mm R

Total tank capacity

~15 kg / ~24 ℓ

Electric consumption (min. - max.)

25 - 60 W

TECHNOLOGY



Glass cleaning system



Removable brazier for easy cleaning



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

FINISHES

Painted steel cladding



White



Black

STANDARD EQUIPMENT



REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function



DISPLAY WITH BUILT-IN WI-FI

("Total Control 3.0" app)

ANGELA EVO

 Ventilated and **hermetic** pellet stove

PRESTIGE

Line

A⁺ | 8,0 kW-N | 230 m³

CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Emergency module
- Extractable burn pot for easy cleaning

ECODESIGN



Download
Technical Sheet



SCAN ME

TECHNICAL DATA

Nominal power (min-max)

2,5 - 8,0 kW-N

Efficiency (min-max)

94,7 - 91,5 %

Hourly consumption (min-max)

0,5 - 1,8 kg/h

Dimensions (LxHxD)

490 x 1007 x 528 mm

Net weight

93 kg

Fumes flue diameter (Ø)

80 mm B


Tank total capacity

~15 kg / ~24 l

Power absorption (min-max)

25 - 60 W

TECHNOLOGY

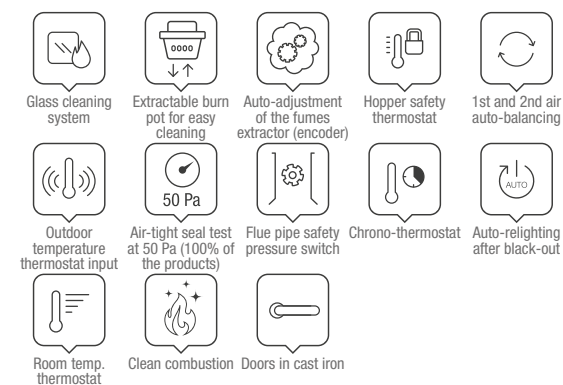

COLOUR CHOICES

High temperature painted steel covering and majolica top cover



Black

White

STANDARD EQUIPMENT

REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function





A⁺ | 8,0 kW-N | 230 m³

CHARACTERISTICS



- Output smoke outlet possibilities: rear aligned
- Hearth, door fire and brazier in cast iron
- Emergency module
- Extractable burn pot for easy cleaning
- Extractable Ash compartment

ECODESIGN



Download
Technical Sheet



SCAN ME

TECHNICAL DATA

Nominal power (min-max)

2,5 - 8,0 kW-N

Efficiency (min-max)

92,6 - 91,2 %

Hourly consumption (min-max)

0,6 - 1,8 kg/h

Dimensions (LxHxD)

470 x 1197 x 470 mm

Net weight

130 kg

Fumes flue diameter (Ø)

80 mm B


Tank total capacity

~15 kg / ~24 l

Power absorption (min-max)

28 - 67 W

TECHNOLOGY

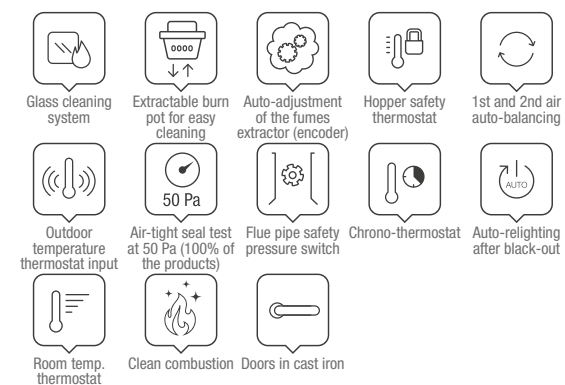

COLOUR CHOICES

High temperature painted steel covering



Bronze

Tortora

STANDARD EQUIPMENT

REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function



OPTIONAL



Kit Glass Night View ROBOX®

PAMELA CRYSTAL - BLSC



Airtight, ventilated pellet stove

PRESTIGE

Line

A⁺ | 8,0 kW-N | 230 m³

ECODESIGN

Download
technical data sheet



SCAN ME

CHARACTERISTICS



- Smoke discharge outlet option: rear on axis
- Cast iron door, hearth and brazier
- Emergency module
- Removable brazier for easy cleaning
- Removable ash compartment



TECHNICAL DATA

Nominal power (min. - max.)

2,5 - 8,0 kW-N

Efficiency (min. - max.)

92,6 - 91,2 %

Hourly consumption (min. - max.)

0,6 - 1,8 kg/h

Dimensions (WxHxD)

470 x 1197 x 470 mm

Net weight

140 kg

Smoke outlet diameter (Ø)

80 mm R

Total tank capacity

~15 kg / ~24 ℓ

Electric consumption (min. - max.)

28 - 67 W

TECHNOLOGY



Glass cleaning system



Removable brazier for easy cleaning



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 Pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

FINISHES

Tempered glass cladding



Crystal BLSC

STANDARD EQUIPMENT

REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function



A⁺ | 9,0 kW-N | 258 m³

CHARACTERISTICS



- Shell and tube exchanger
- T tube integrated in the product, inspectable from the rear
- Hearth, door fire and brazier in cast iron
- Emergency module
- Extractable burn pot for easy cleaning
- Extractable ash drawer

ECODESIGN

Download
Technical Sheet



SCAN ME



TECHNICAL DATA

Nominal power (min-max)
3,8 - 9,0 kW-N

Efficiency (min-max)
92,2 - 92,7 %

Hourly consumption (min-max)
0,9 - 2,0 kg/h

Dimensions (LxHxD)
550 x 1200 x 573 mm


Net weight
141 kg
PT 167 kg

Fumes flue diameter (Ø)
80 mm B/T

Tank total capacity
~18 kg / ~29 ℓ

Power absorption (min-max)
24 - 62 W

TECHNOLOGY

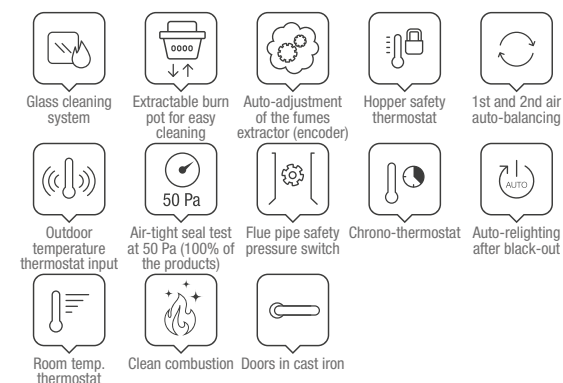

COLOUR CHOICES

High temperature painted steel covering and majolica top cover or natural stone



White

Black

Natural stone (PT)

STANDARD EQUIPMENT



REMOTE CONTROL
Control with radio-controlled "hand-held" device, with thermostat function

OPTIONAL



Kit Glass Night View ROBAX®

MIRKA PLUS

Ducted pellet stove

PRESTIGE

Line

A⁺ | **8,0 kW-N** | **230 m³**

CHARACTERISTICS



- Smoke discharge outlet option: rear, upper
- New "5-star" brazier + EGR
- Ducting with dedicated motor up to 8 metres, thermostatically controlled and removable + AIR ZONE CONTROL
- Radiant surface heat exchanger
- Removable ash compartment
- Home automation integration with "Alexa" (Amazon). N.B. only with "Grey label" WiFi module – optional – and using the App Total Control 3.0. Service and "Alexa" device (Amazon) not included
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Easy Control
- Self Control
- Easy Setup



UP TO 8 METRES OF DUCTS
through one back output Ø80
(excludable)

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

3,2 - 8,0 kW-N

Efficiency (min. - max.)

92,5 - 91,0 %

Hourly consumption (min. - max.)

0,7 - 1,8 kg/h

Dimensions (WxHxD)

496 x 1014 x 585 mm

Net weight

108 kg

Smoke outlet diameter (Ø)

80 mm U/R

Total tank capacity

~15 kg / ~24 l

Electric consumption (min. - max.)

45 - 96 W

TECHNOLOGY



Glass cleaning system



Removable brazier for easy cleaning



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

FINISHES

Black painted steel cladding and ceramic or stone front panel



Black



Tortora



Natural stone

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR Touch remote control



BLACK LCD

ANGELA PLUS EVO



Hermetic pellet stove with ducting system

PRESTIGE

Line

A⁺ | 8,0 kW-N | 230 m³

CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Ducting system output possibilities (Ø80 mm): rear
- Emergency module
- Extractable burn pot for easy cleaning
- Extractable Ash compartment



UP TO 8 METRES OF DUCTS
through one back output Ø80
(excludable)

ECODESIGN



Download
Technical Sheet



SCAN ME

TECHNICAL DATA

Nominal power (min-max)
2,5 - 8,0 kW-N

Efficiency (min-max)
94,9 - 91,9 %

Hourly consumption (min-max)
0,5 - 1,8 kg/h

Dimensions (LxHxD)
490 x 1007 x 528 mm


Net weight
98 kg

Fumes flue diameter (Ø)
80 mm B

Tank total capacity
~15 kg / ~24 ℓ

Power absorption (min-max)
50 - 80 W

TECHNOLOGY

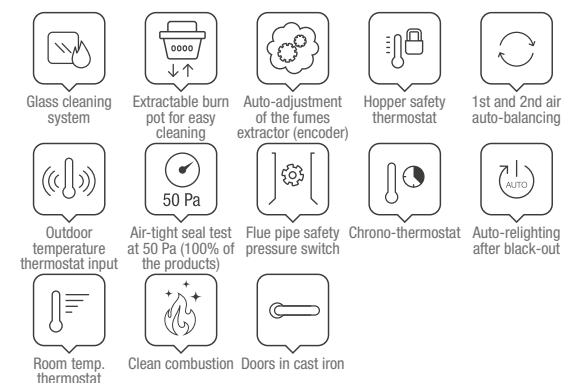

COLOUR CHOICES

High temperature painted steel covering and majolica top cover



White

Black

STANDARD EQUIPMENT



REMOTE CONTROL
Control with radio-controlled
"hand-held" device, with thermo-
stat function




A⁺ | 8,0 kW-N | 230 m³

CHARACTERISTICS



- Removable brazier for easy cleaning
- Removable ash compartment
- Shell and tube heat exchanger
- Ducting with dedicated motor up to 8 metres, thermostatically controlled and removable + AIR ZONE CONTROL
- Room temperature control with AUTOMATIC function
- Home automation integration with "Alexa"
- Easy Setup
- Easy Control
- Self Control



UP TO 8 METRES OF DUCTS
through one back output Ø80
(excludable)

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

2,5 - 8,0 kW-N

Efficiency (min. - max.)

94,9 - 91,9 %

Hourly consumption (min. - max.)

0,5 - 1,8 kg/h

Dimensions (WxHxD)

507 x 1007 x 558 mm

Net weight

105 kg

Smoke outlet diameter (Ø)

80 mm R

Total tank capacity

~15 kg / ~24 ℓ

Electric consumption (min. - max.)

45 - 75 W

TECHNOLOGY



Glass cleaning system



Removable brazier for easy cleaning



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

FINISHES

Painted steel cladding



White



Black

STANDARD EQUIPMENT

REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function

DISPLAY WITH BUILT-IN WI-FI

("Total Control 3.0" app)



GABRIELLA PLUS




Tight and **hermetic** pellet stove with ducting system

PRESTIGE


Line

A⁺ | 8,0 kW-N | 230 m³

CHARACTERISTICS

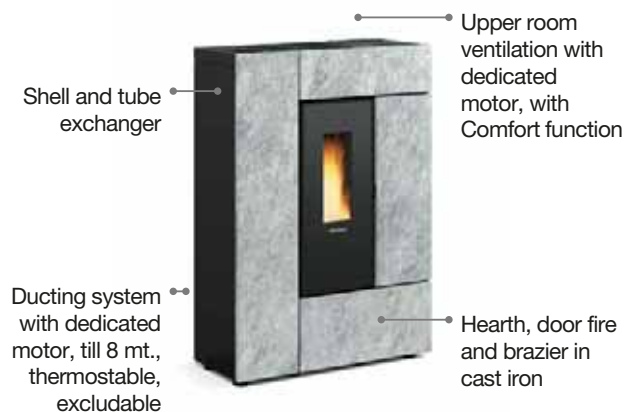

- Output smoke outlet possibilities: upper-backside, upper
- Extractable burn pot for easy cleaning
- Extractable Ash compartment



UP TO 8 METRES OF DUCTS
through one back or left side output Ø80
(excludable)

ECODESIGN

Download
Technical Sheet



SCAN ME



TECHNICAL DATA

Nominal power (min-max)

3,5 - 8,0 kW-N

Efficiency (min-max)

94,1 - 94,0 %

Hourly consumption (min-max)

0,8 - 1,8 kg/h

Dimensions (LxHxD)

750 x 1077 x 350 mm

Net weight

132 kg

PT 160 kg

Fumes flue diameter (Ø)

80 mm B/T

Tank total capacity

~15 kg / ~24 l

Power absorption (min-max)

50 - 90 W

TECHNOLOGY



Glass cleaning system



Extractable burn pot for easy cleaning



Auto-adjustment of the fumes extractor (encoder)



Hopper safety thermostat



1st and 2nd air auto-balancing



Outdoor temperature thermostat input



Air-tight seal test at 50 Pa (100% of the products)



Flue pipe safety pressure switch



Chrono-thermostat



Auto-reighting after black-out



Room temp. thermostat



Clean combustion



Doors in cast iron

COLOUR CHOICES

High temperature painted steel covering or natural stone



White



Bronze



Natural stone (PT)

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR touch remote control



BLACK LCD

DEBBY PLUS EVO



Airtight, ducted pellet stove


PRESTIGE

Line

New 2023

A⁺ | 9,0 kW-N | 258 m³

CHARACTERISTICS

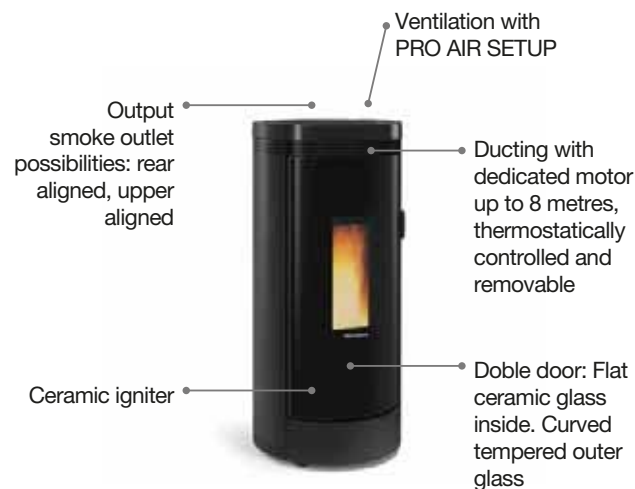

- Shell and tube exchanger
- T tube integrated in the product, inspectable from the rear
- Hearth, door fire and brazier in cast iron
- Safety button
- Extractable ash drawer
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- FPC PLUS - besides the work carried out by FPC, it allows abnormal situations to be noted by setting the generator in safe conditions.
- With AIR ZONE CONTROL (AZC), the speed of rotation of the ducted fan is controlled in order to maximise the transmission of thermal power in the ducted environment.

ECODESIGN

Download
Technical Sheet



SCAN ME



TECHNICAL DATA

Nominal power (min-max)

3,8 - 9,0 kW-N

Efficiency (min-max)

92,2 - 92,7 %

Hourly consumption (min-max)

0,9 - 2,0 kg/h

Dimensions (LxHxD)

550 x 1200 x 573 mm

Net weight

141 kg

PT 167 kg

Fumes flue diameter (Ø)

80 mm B/T


Tank total capacity

~18 kg / ~29 ℓ

Power absorption (min-max)

24 - 62 W

TECHNOLOGY

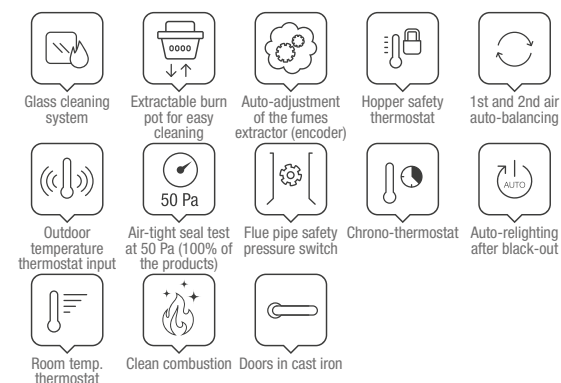

COLOUR CHOICES

High temperature painted steel covering and majolica top cover or natural stone



White

Black

Natural stone (PT)

STANDARD EQUIPMENT

REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function



OPTIONAL



Kit Glass Night View ROBOX®

SHARON PLUS



Tight and **hermetic** pellet stove with ducting system

PRESTIGE

Line

A⁺ | 10,0 kW-N | 287 m³

CHARACTERISTICS



- Extractable burn pot for easy cleaning
- Output smoke outlet possibilities: rear, upper
- Ducting system output possibilities (Ø80 mm): rear
- Radiant surface heat exchanger
- Double door: Glass ceramic external door
- Wide fire vision
- Reduced depth (slim)
- Emergency module
- Ash compartment
- Door fire and brazier in cast iron
- With the AUTOMATIC function activated, the stove manages the power output so that the room temperature set by the user remains constant. This minimises power fluctuations to the benefit of thermal and acoustic comfort
- With AIR ZONE CONTROL (AZC) the speed of rotation of the ducting fan is managed with the aim of maximising the transmission of thermal power in the ducted environment

ECODESIGN



Download
Technical Sheet



SCAN ME

TECHNICAL DATA

Nominal power (min-max)

3,5 - 10,0 kW-N

Efficiency (min-max)

91,7 - 91,0 %

Hourly consumption (min-max)

0,8 - 2,3 kg/h

Dimensions (LxHxD)

900 x 1150 x 290 mm

Net weight

155 kg - PT 167 kg

Fumes flue diameter (Ø)

80mm B/T


Tank total capacity

~21 kg / ~33 ℓ

Power absorption (min-max)

30 - 50 W

TECHNOLOGY

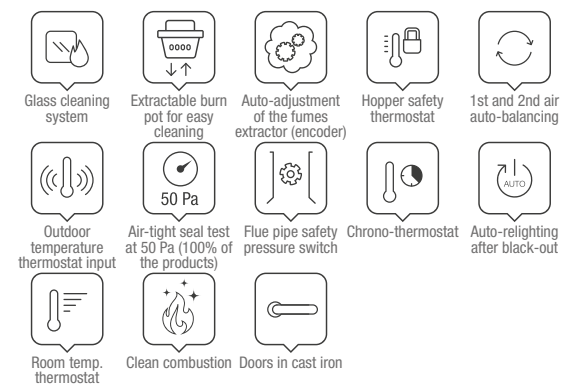

COLOUR CHOICES

Glass or natural stone covered



Crystal

Natural stone (PT)

STANDARD EQUIPMENT



REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function

OPTIONAL

KIT DUCTING

Right side ducting kit



SHARON PLUS STEEL




Airtight, ducted, slim pellet stove

PRESTIGE

Line

A⁺ | 10,0 kW-N | 287 m³

CHARACTERISTICS

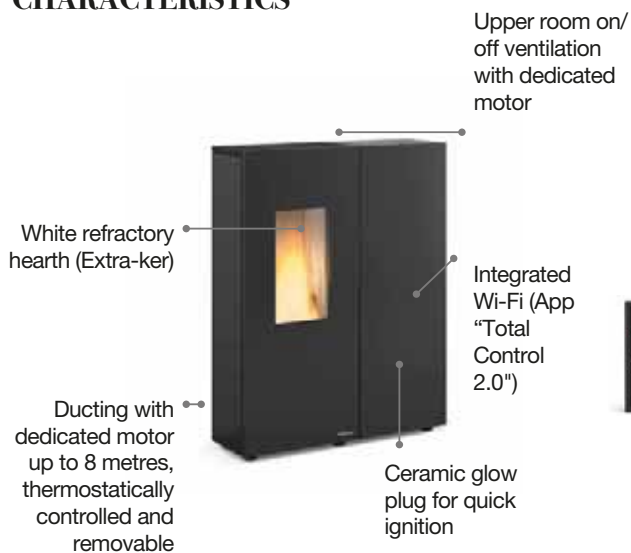

- Removable brazier for easy cleaning
- Smoke discharge outlet option: rear, upper
- Ducting outlet options (Ø80 mm): rear
- Radiant surface heat exchanger
- Double door
- Wide view of the flame
- Reduced depth
- Emergency module
- Ash compartment
- Cast iron door and brazier
- With the AUTOMATIC function activated, the stove manages the power output so that the room temperature set by the user remains constant. This minimises power fluctuations to the benefit of thermal and acoustic comfort
- With AIR ZONE CONTROL (AZC) the speed of rotation of the ducting fan is managed with the aim of maximising the transmission of thermal power in the ducted environment

ECODESIGN

Download technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

3,5 - 10,0 kW-N

Efficiency (min. - max.)

91,7 - 91,0 %

Hourly consumption (min. - max.)

0,8 - 2,3 kg/h

Dimensions (WxHxD)

900 x 1150 x 295 mm

Net weight

155 kg

Smoke outlet diameter (Ø)

80 mm R/U

Total tank capacity

~21 kg / ~33 l

Electric consumption (min. - max.)

30 - 50 W

TECHNOLOGY



Glass cleaning system



Removable brazier for easy cleaning



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

FINISHES

Painted steel cladding



Black

STANDARD EQUIPMENT

REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function



OPTIONAL

KIT DUCTING

Right side ducting kit





A⁺ | 14,2 kW-N | 11,0 kW-H₂O | 407 m³

CHARACTERISTICS



- Pressure transducer and display pressure value indication
- Output smoke outlet possibilities: rear
- Safety valve 3 bar
- Combustion chamber in thick steel
- Air relief valve
- Ergonomic handle
- Door fire and brazier in cast iron
- Thermal and pressure safety
- Expansion tank
- Extractable ash drawer

ECODESIGN



Download
Technical Sheet



SCAN ME

TECHNICAL DATA

Nominal power (min-max)

4,1 - 14,2 kW-N

Power given back to water (min-max)

2,9 - 11,0 kW-H₂O

Efficiency (min-max)

92,9 - 91,1 %

Hourly consumption (min-max)

0,9 - 3,2 kg/h

Dimensions (LxHxD)

511 x 1150 x 632 mm

Net weight

163 kg

Fumes flue diameter (Ø)

100 mm B

Tank total capacity

~27 kg / ~43 l


Power absorption (min-max)

65 - 95 W

Operating pressure (bar)

3 bar

TECHNOLOGY

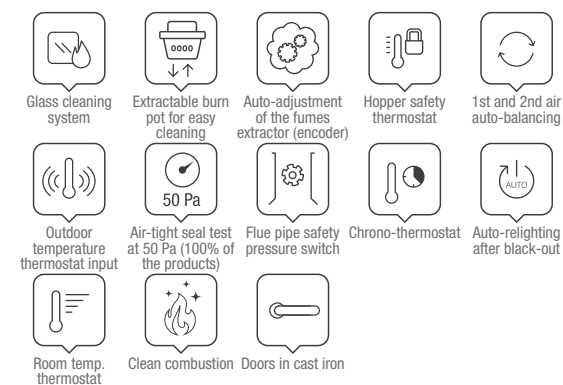

COLOUR CHOICES

High temperature painted steel covering and majolica top cover



Ivory

Bordeaux

Bronze

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR touch remote control



BLACK LCD

Evolution
line

THE TECHNOLOGICAL


REVOLUTION OF HEAT



VENTILATED

Pellet Stove

Evolution
line

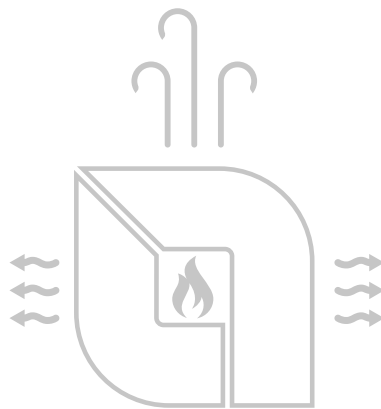

Totally Air-tight

Home control Solution



AIR-TIGHT

SAFE: Air-tight combustion chamber and tank:
technology and innovation at the service of your safety



THE LATEST GENERATION IGNITION SYSTEM

FAST: For immediate warmth in your home, always and everywhere



HOME CONTROL SOLUTION

INNOVATIVE: Always in contact with your stove, even when you
are away from home



OPTIMISED COMBUSTION

EFFICIENT: Reduces the waiting time for relighting, ensuring
optimal combustion



SELF-CLEANING BRAZIER

CONVENIENT: your stove cleans itself



CONTROL WITH MULTI-FUNCTION RADIO REMOTE CONTROL HANDHELD DEVICE

AGILE: All the control functions of the stove, but also with a remote
thermostat



MIETTA EVO



Ventilated and **hermetic** pellet stove

Evolution
life

A⁺ | 9,0 kW-N | 258 m³

CHARACTERISTICS



- Shell and tube exchanger
- Output smoke outlet possibilities: rear
- Combustion chamber probe
- Hearth, door fire and brazier in cast iron
- Emergency module
- Extractable ash drawer
- Possibility to select the power even into the individual slot of chrono

ECODESIGN



Download
Technical Sheet



SCAN ME



TECHNICAL DATA

Nominal power (min-max)

3,4 - 9,0 kW-N

Efficiency (min-max)

93,9 - 93,1 %

Hourly consumption (min-max)

0,8 - 2,0 kg/h

Dimensions (LxHxD)

496 x 1073 x 579 mm

Net weight

157 kg

Fumes flue diameter (Ø)

80 mm B


Tank total capacity

~20 kg / ~32 ℓ

Power absorption (min-max)

26 - 43 W

TECHNOLOGY

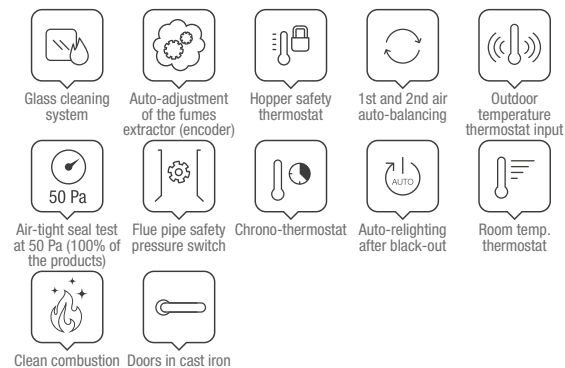

COLOUR CHOICES

High temperature painted steel covering and majolica top cover



Bordeaux

White

STANDARD EQUIPMENT



REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function

KATIA 9



Airtight, ventilated pellet stove

Evolution
line

A⁺ | 9,0 kW-N | 258 m³

CHARACTERISTICS



- Shell and tube heat exchanger
- Cast iron door, hearth and brazier
- Double glass door
- Combustion chamber probe
- Room temperature control with AUTOMATIC function
- Home automation integration with "Alexa"
- Easy Setup
- Easy Control
- Self Control



Curved ceramic glass

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

3,4 - 9,0 kW-N

Efficiency (min. - max.)

93,9 - 93,1 %

Hourly consumption (min. - max.)

0,8 - 2,0 kg/h

Dimensions (WxHxD)

515 x 1082 x 572 mm

Net weight

155 kg

Smoke outlet diameter (Ø)

80 mm R

Total tank capacity

~20 kg / ~32 ℓ

Electric consumption (min. - max.)

26 - 43 W

TECHNOLOGY



FINISHES

Painted steel cladding



White

Bronze

Tortora

STANDARD EQUIPMENT

REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function

DISPLAY WITH BUILT-IN WI-FI

("Total Control 3.0" app)



KATIA 11



Airtight, ventilated pellet stove

Evolution
line

A⁺ | 11,0 kW-N | 315 m³

ECODESIGN

Download
technical data sheet



SCAN ME

CHARACTERISTICS



- Shell and tube heat exchanger
- Cast iron door, hearth and brazier
- Double glass door
- Combustion chamber probe
- Room temperature control with AUTOMATIC function
- Home automation integration with "Alexa"
- Easy Setup
- Easy Control
- Self Control



Curved ceramic glass



TECHNICAL DATA

Nominal power (min. - max.)

3,4 - 11,0 kW-N

Efficiency (min. - max.)

93,9 - 91,4 %

Hourly consumption (min. - max.)

0,8 - 2,5 kg/h

Dimensions (WxHxD)

515 x 1082 x 572 mm

Net weight

155 kg

Smoke outlet diameter (Ø)

80 mm R


Total tank capacity

~20 kg / ~32 l

Electric consumption (min. - max.)

26 - 45 W

TECHNOLOGY

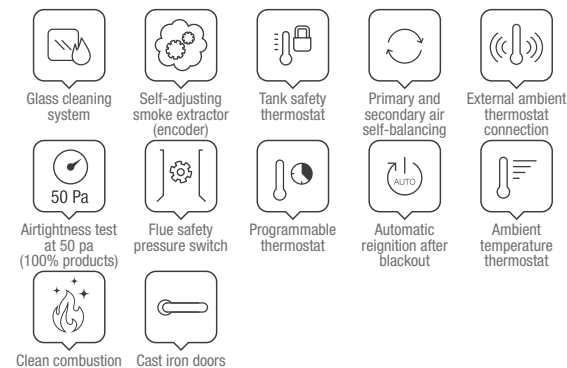

FINISHES

Painted steel cladding



White

Bronze

Tortora

STANDARD EQUIPMENT

REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function

DISPLAY WITH BUILT-IN WI-FI

("Total Control 3.0" app)



A⁺ | 11,0 kW-N | 315 m³

CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Shell and tube exchanger
- Combustion chamber probe
- Hearth, door fire and brazier in cast iron
- Emergency module
- Single door with double glass ceramic
- Extractable burn pot for easy cleaning
- Extractable ash drawer
- Removable handle with storage compartment

ECODESIGN



Download
Technical Sheet



SCAN ME

TECHNICAL DATA

Nominal power (min-max)

3,4 - 11,0 kW-N

Efficiency (min-max)

93,9 - 91,4 %

Hourly consumption (min-max)

0,8 - 2,5 kg/h

Dimensions (LxHxD)

480 x 1140 x 560 mm

Net weight

173 kg

Fumes flue diameter (Ø)

80 mm B


Tank total capacity

~22 kg / ~35 l

Power absorption (min-max)

25 - 45 W

TECHNOLOGY

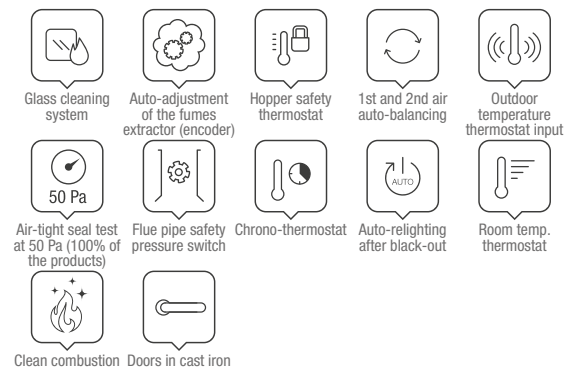

COLOUR CHOICES

Painted steel covered, top and bottom in majolica



White

Bright tortora

STANDARD EQUIPMENT



REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function

A⁺ | 12,0 kW-N | 344 m³

CHARACTERISTICS



- Cast iron door, hearth and brazier
- Extractable ash drawer
- Brushless gear motor for pellet loading
- Combustion chamber probe
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Home automation integration with “Alexa” (Amazon).N.B. only with “Grey label” WiFi module – optional – and using the App Total Control 3.0. Service and “Alexa” device (Amazon) not included
- Easy Setup
- Easy Control
- Self Control

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

3,6 - 12,0 kW-N

Efficiency (min. - max.)

93,0 - 91,4 %

Hourly consumption (min. - max.)

0,8 - 2,7 kg/h

Dimensions (WxHxD)

576 x 1174 x 642 mm

Net weight

188 kg

Smoke outlet diameter (Ø)

80 mm R


Total tank capacity

~29 kg / ~46 l

Electric consumption (min. - max.)

45 - 58 W

TECHNOLOGY

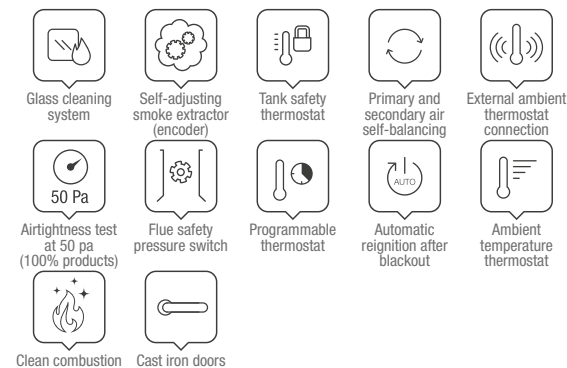

FINISHES

Painted steel cladding



White

Bronze

Tortora

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR Touch remote control



BLACK LCD

A⁺ | 12,0 kW-N | 344 m³

CHARACTERISTICS



- Cast iron door, hearth and brazier
- Extractable ash drawer
- Brushless gear motor for pellet loading
- Combustion chamber probe
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Home automation integration with “Alexa” (Amazon). N.B. only with “Grey label” WiFi module – optional – and using the App Total Control 3.0. Service and “Alexa” device (Amazon) not included
- Easy Setup
- Easy Control
- Self Control

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

3,6 - 12,0 kW-N

Efficiency (min. - max.)

93,0 - 91,4 %

Hourly consumption (min. - max.)

0,8 - 2,7 kg/h

Dimensions (WxHxD)

576 x 1174 x 642 mm

Net weight

201 kg

Smoke outlet diameter (Ø)

80 mm R


Total tank capacity

~29 kg / ~46 l

Electric consumption (min. - max.)

45 - 58 W

TECHNOLOGY

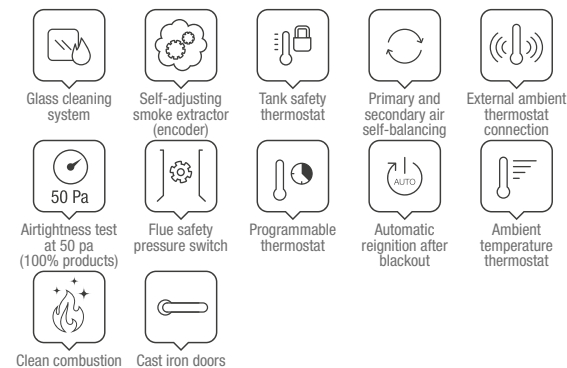

FINISHES

Majolica and painted steel cladding



White

Tortora

STANDARD EQUIPMENT



REMOTE CONTROL


Backlit IR Touch remote control



BLACK LCD

DUCTED PELLET STOVE

Evolution
line

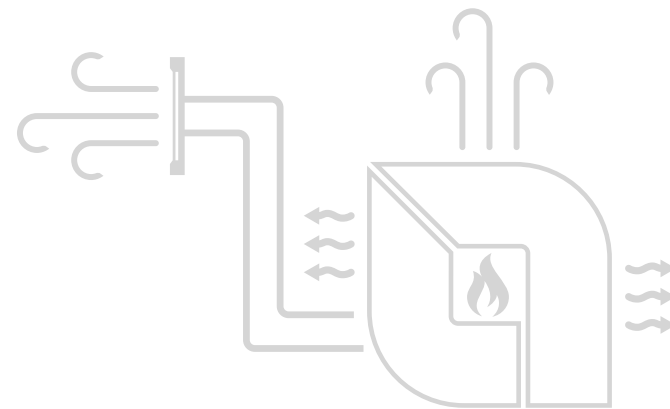

The product range with one
or more motors dedicated to
thermostable duct heating.

UP TO 8 METRES

PER DUCT



AIR-TIGHT STOVE

SAFE: Technology and innovation at the service of your safety.



HOME CONTROL SOLUTION

INNOVATIVE: Always in contact with your stove, even when you are away from home

A+ | 12,0 kW-N | 344 m³

CHARACTERISTICS



- New "5-star" brazier
- Cast iron door, hearth and brazier
- Extractable ash drawer
- Brushless gear motor for pellet loading
- Combustion chamber probe
- AIR ZONE CONTROL function for ducting
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Home automation integration with "Alexa" (Amazon).N.B. only with "Grey label" WiFi module – optional – and using the App Total Control 3.0. Service and "Alexa" device (Amazon) not included
- Easy Setup
- Easy Control
- Self Control



UP TO 16 METRES (8m for 2 outputs) OF DUCTS

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

3,6 - 12,0 kW-N

Efficiency (min. - max.)

93,4 - 91,8 %

Hourly consumption (min. - max.)

0,8 - 2,7 kg/h

Dimensions (WxHxD)

576 x 1174 x 642 mm

Net weight

195 kg

Smoke outlet diameter (Ø)

80 mm R

Total tank capacity

~29 kg / ~46 l

Electric consumption (min. - max.)

60 - 105 W

TECHNOLOGY



FINISHES

Painted steel cladding



White

Bronze

Tortora

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR Touch remote control



BLACK LCD

NORIS PLUS LUX



Airtight, double ducted pellet stove

Evolution
line

A⁺ | 12,0 kW-N | 344 m³

CHARACTERISTICS

Double ducting
with two
dedicated
motors up
to 8 metres,
thermostatically
controlled and
removable
+ AIR ZONE
CONTROL



Ventilation
and ducting
with PRO AIR
SET UP, both
excludable

Self-cleaning
brazier with
Brushless motor

Ceramic glow
plug for quick
ignition

- New "5-star" brazier
- Cast iron door, hearth and brazier
- Extractable ash drawer
- Brushless gear motor for pellet loading
- Combustion chamber probe
- AIR ZONE CONTROL function for ducting
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Home automation integration with "Alexa" (Amazon).N.B. only with "Grey label" WiFi module – optional – and using the App Total Control 3.0. Service and "Alexa" device (Amazon) not included
- Easy Setup
- Easy Control
- Self Control



UP TO 16 METRES (8m for 2 outputs) OF DUCTS

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

3,6 - 12,0 kW-N

Efficiency (min. - max.)

93,4 - 91,8 %

Hourly consumption (min. - max.)

0,8 - 2,7 kg/h

Dimensions (WxHxD)

576 x 1174 x 642 mm

Net weight

208 kg

Smoke outlet diameter (Ø)

80 mm R

Total tank capacity

~29 kg / ~46 l

Electric consumption (min. - max.)

60 - 105 W

TECHNOLOGY



Glass cleaning system



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 Pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

FINISHES

Majolica and painted steel cladding



White



Tortora

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR Touch remote control



BLACK LCD

TERRY PLUS



Hermetic pellet stove with ducting system and two different outlets

Evolution
life

A⁺ | 12,1 kW-N | 347 m³

CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Ducting system output possibilities (Ø80 mm): rear
- Front room ventilation with dedicated motor, with Comfort function
- Extractable hearth (only by authorized assistance)
- Hearth, door fire and brazier in cast iron
- Ergonomic handle
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Emergency module
- Extractable ash drawer



UP TO 16 METRES (8m for 2 outputs) OF DUCTS with 3 independent ventilators that can be managed with 4 time ranges

ECODESIGN

Download
Technical Sheet



SCAN ME



TECHNICAL DATA

Nominal power (min-max)

3,5 - 12,1 kW-N

Efficiency (min-max)

92,0 - 94,0 %

Hourly consumption (min-max)

0,8 - 2,7 kg/h

Dimensions (LxHxD)

569 x 1151 x 598 mm

Net weight

206 kg

Fumes flue diameter (Ø)

80 mm B

Tank total capacity

~29 kg / ~46 l

Power absorption (min-max)

50 - 96 W

TECHNOLOGY



Glass cleaning system



Auto-adjustment of the fumes extractor (encoder)



Hopper safety thermostat



1st and 2nd air auto-balancing



Outdoor temperature thermostat input



Air-tight seal test at 50 Pa (100% of the products)



Flue pipe safety pressure switch



Chrono-thermostat



Auto-relighting after black-out



Room temperature thermostat



Clean combustion



Doors in cast iron

COLOUR CHOICES

External facing in majolica



Bordeaux



White



Bright tortora

STANDARD EQUIPMENT



REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function



THE LATEST GENERATION IGNITION SYSTEM

FAST: For immediate warmth in your home, always and everywhere



EXCLUDABLE FORCED VENTILATION

SILENT: silence, without sacrificing efficiency



PWM PUMP AUTOMATICALLY CONTROLLED BY THE ELECTRONIC BOARD

SIMPLE: Relax, the performance of your system is self-adjusting



NEW ELECTRONICS FOR CONNECTING TO THE SYSTEM EXPANSION CARD

FLEXIBLE: Maximum flexibility in the management of comfort in the rooms



HOME CONTROL SOLUTION

INNOVATIVE: Always in contact with your stove, even when you are away from home



SELF-CLEANING BRAZIER

CONVENIENT: your stove cleans itself



OPTIMISED COMBUSTION


EFFICIENT: Reduces the waiting time for relighting, ensuring optimal combustion

Silent and powerful,
they distribute the heat
rapidly and uniformly
throughout the home.



Evolution
line

P
E
L
L
E
T
H
E
A
T
I
N
G
S
T
O
V
E
S

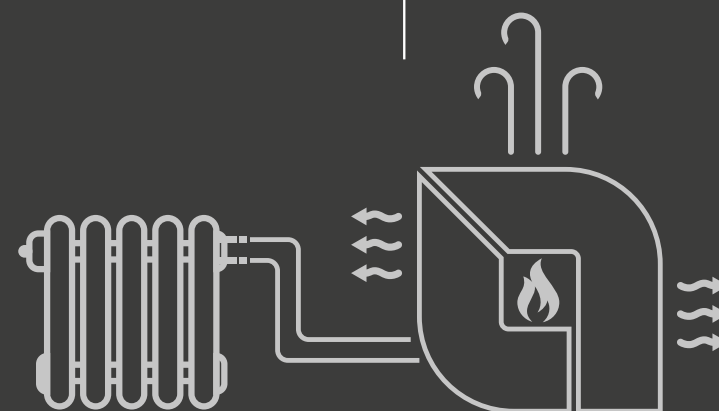

A⁺ | 16,2 kW-N | 14,0 kW-H₂O | 465 m³

CHARACTERISTICS



- Air relief valve
- Output smoke outlet possibilities: rear
- Wide fire vision
- Pressure transducer and display pressure value indication
- Combustion chamber in thick steel
- Ergonomic handle
- Door fire and brazier in cast iron
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Thermal and pressure safety
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer

ECODESIGN



Download
Technical Sheet



SCAN ME

TECHNICAL DATA

Nominal power (min-max)
4,6 - 16,2 kW-N

Power given back to water (min-max)
3,6 - 14,0 kW-H₂O

Efficiency (min-max)
90,6 - 90,9 %

Hourly consumption (min-max)
1,1 - 3,7 kg/h

Dimensions (LxHxD)
576 x 1157 x 621 mm

Net weight
210 kg

Fumes flue diameter (Ø)
100 mm B

Tank total capacity
~30 kg / ~48 l

Power absorption (min-max)
20 - 40 W

Operating pressure (bar)
3 bar

TECHNOLOGY



COLOUR CHOICES

High temperature painted steel covering



STANDARD EQUIPMENT



REMOTE CONTROL
Backlit IR touch remote control



BLACK LCD

FIANDRA IDRO EVO*



Hermetic and ventilated pellet thermo-stove

Evolution
line

A⁺ | 16,2 kW-N | 14,0 kW-H₂O | 465 m³

ECODESIGN

Download
Technical Sheet



SCAN ME

CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Wide fire vision
- Pressure transducer and display pressure value indication
- Combustion chamber in thick steel
- Ergonomic handle
- Door fire and brazier in cast iron
- Combustion chamber probe
- Air relief valve
- Emergency module
- Shell and tube exchanger (manual cleaning)
- Thermal and pressure safety
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer



TECHNICAL DATA

Nominal power (min-max)

4,6 - 16,2 kW-N

Power given back to water (min-max)

3,6 - 14,0 kW-H₂O

Efficiency (min-max)

90,6 - 90,9 %

Hourly consumption (min-max)

1,1 - 3,7 kg/h

Dimensions (LxHxD)

570 x 1145 x 621 mm

Net weight

226 kg

Fumes flue diameter (Ø)

100 mm B

Tank total capacity

~30 kg / ~48 l

Power absorption (min-max)

20 - 40 W

Operating pressure (bar)

3,0 bar

TECHNOLOGY



Glass cleaning system



Auto-adjustment of the fumes extractor (encoder)



Hopper safety thermostat



1st and 2nd air auto-balancing



Outdoor temperature thermostat input



Air-tight seal test at 50 Pa (100% of the products)



Flue pipe safety pressure switch



Chrono-thermostat



Auto-relighting after black-out



Room temp. thermostat



Clean combustion



Doors in cast iron

COLOUR CHOICES

External facing in majolica



Panna

STANDARD EQUIPMENT



REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function

* While stocks last

EVELYNE IDRO 2.0






Airtight, ventilated, slim pellet thermo-stove

Evolution
life

A⁺ | 18,0 kW-N | 14,8 kW-H₂O | 517 m³

CHARACTERISTICS

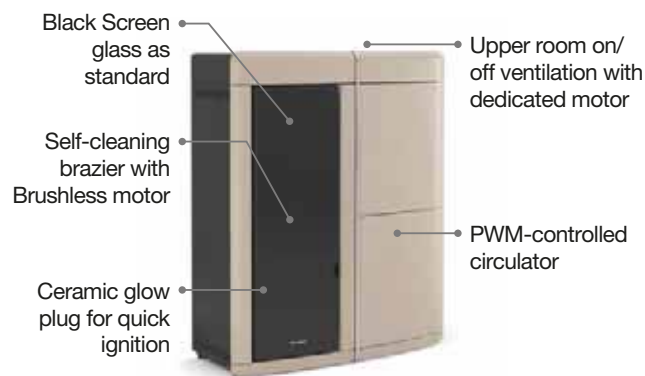

Side plumbing attachments.
New location, easy to reach for connections and maintenance.

- Vent
- Smoke discharge outlet option: rear, upper, right-hand side
- Reduced depth
- Pressure transducer with display
- Thick steel combustion chamber
- Cast iron door and brazier
- Combustion chamber probe
- Double door: outer door with flat tempered glass
- Side shell and tube heat exchanger (manual cleaning)
- Emergency module
- Thermal and water pressure relief valves
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer

ECODESIGN

Download
technical data sheet



SCAN ME



TECHNICAL DATA

Nominal power (min. - max.)

5,3 - 18,0 kW-N

Water heating power (min. - max.)

3,5 - 14,8 kW-H₂O

Efficiency (min. - max.)

95,9 - 93,5 %

Hourly consumption (min. - max.)

1,1 - 4,0 kg/h

Dimensions (WxHxD)

878 x 1098 x 412 mm

Net weight

209 kg

Smoke outlet diameter (Ø)

100 mm R/U/RH side

Total tank capacity

~27 kg / ~43 l

Electric consumption (min. - max.)

80 - 85 W

Working pressure (bar)

3 bar

TECHNOLOGY



Glass cleaning system



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 Pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

FINISHES

Majolica cladding



Grey



White



Tortora



STANDARD EQUIPMENT

REMOTE CONTROL

Control with radio-controlled "hand-held" device, with thermostat function

DISPLAY WITH BUILT-IN WI-FI

("Total Control 2.0" app)

ISIDORA IDRO H16

Ventilated pellet thermo-stove

Evolution
line

A⁺ | 18,7 kW-N | 16,0 kW-H₂O | 536 m³

ECODESIGN

Download
Technical Sheet



SCAN ME

CHARACTERISTICS



- Air relief valve
- Upper room ventilation with dedicated motor, excludable
- Output smoke outlet possibilities: rear aligned
- Pressure transducer and display pressure value indication
- Combustion chamber in thick steel
- Ergonomic handle
- Door fire and brazier in cast iron
- Hermetic tank
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Thermal and pressure safety
- Wide fire vision
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer



TECHNICAL DATA

Nominal power (min-max)
5,6 - 18,7 kW-N

Power given back to water (min-max)
4,3 - 16,0 kW-H₂O

Efficiency (min-max)
91,5 - 92,4 %

Hourly consumption (min-max)
1,3 - 4,2 kg/h

Dimensions (LxHxD)
596 x 1165 x 708 mm

Net weight
227 kg


Fumes flue diameter (Ø)
100 mm B

Tank total capacity
~33 kg / ~53 ℓ

Power absorption (min-max)
60 - 85 W

Operating pressure (bar)
3 bar

TECHNOLOGY

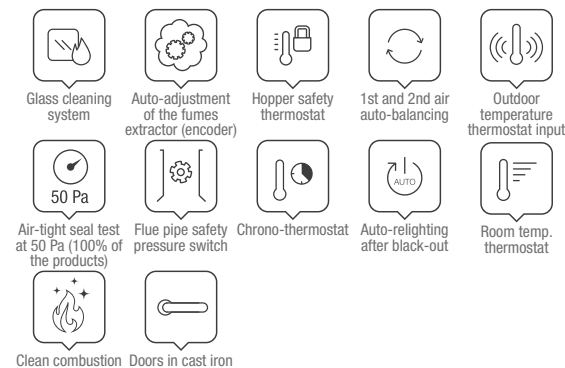

COLOUR CHOICES

Finish in majolica and painted sheet metal



Bordeaux

White

Bright tortora

STANDARD EQUIPMENT



REMOTE CONTROL
Backlit IR touch remote control



DISPLAY BLACK MASK
Display Black Mask with integrated Wi-Fi (App "Total Control 2.0")

ISIDORA IDRO H2O

Ventilated pellet thermo-stove

Evolution
life

A++ | 23,2 kW-N | 20,0 kW-H₂O | 665 m³

CHARACTERISTICS



- Air relief valve
- Upper room ventilation with dedicated motor, excludable
- Output smoke outlet possibilities: rear aligned
- Pressure transducer and display pressure value indication
- Combustion chamber in thick steel
- Ergonomic handle
- Door fire and brazier in cast iron
- Hermetic tank
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Thermal and pressure safety
- Wide fire vision
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer

ECODESIGN



Download
Technical Sheet



SCAN ME

TECHNICAL DATA

Nominal power (min-max)

6,9 - 23,2 kW-N

Power given back to water (min-max)

5,5 - 20,0 kW-H₂O

Efficiency (min-max)

91,2 - 91,5 %

Hourly consumption (min-max)

1,6 - 5,3 kg/h

Dimensions (LxHxD)

596 x 1243 x 708 mm

Net weight

235 kg

Fumes flue diameter (Ø)

100 mm B

Tank total capacity

~38 kg / ~61 l

Power absorption (min-max)

65 - 85 W

Operating pressure (bar)

3 bar

TECHNOLOGY



COLOUR CHOICES

Finish in majolica and painted sheet metal



Ivory

Bordeaux

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR touch remote control



DISPLAY BLACK MASK

Display Black Mask with integrated Wi-Fi (App "Total Control 2.0")

ISIDORA IDRO H23 5.0

Ventilated pellet thermo-stove

Evolution
life

New 2023

A++ | 26,7** kW-N | 23,0** kW-H₂O | ** m³

ECODESIGN**

Download
Technical Sheet



SCAN ME

CHARACTERISTICS



- Air relief valve
- Upper room ventilation with dedicated motor, excludable
- Output smoke outlet possibilities: rear aligned
- Combustion chamber in thick steel
- Fire door and brazier in cast iron
- Airtight tank
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- FPC PLUS – besides the work carried out by FPC, it allows abnormal situations to be noted by setting the generator in safe conditions.



- Home automation integration with “Alexa” (Amazon).N.B. only with “Grey label” WiFi module – optional – and using the App Total Control 3.0. Service and “Alexa” device (Amazon) not included

TECHNICAL DATA

Nominal power (min-max)

26,7 kW-N **

Power given back to water (min-max)

23,0 kW-H₂O **

Efficiency (min-max)

% **

Hourly consumption (min-max)

kg/h **

Dimensions (LxHxD)

596 x 1243 x 708 mm **

Net weight

kg **

Fumes flue diameter (Ø)

100 mm B **

Tank total capacity

~38 kg / ~61 l **

Power absorption (min-max)

W **

Operating pressure (bar)

**

TECHNOLOGY



COLOUR CHOICES

Finish in majolica and painted sheet metal



White

Bordeaux

STANDARD EQUIPMENT



REMOTE CONTROL

Backlit IR touch remote control



DISPLAY BLACK MASK

Display Black Mask with integrated Wi-Fi (App “Total Control 3.0”)

** Technical data may be subject to changes, approval pending

PELLET BOILERS

Evolution
line

Saving, comfort
and technology



>> **THE LATEST GENERATION IGNITION SYSTEM**
FAST: For immediate warmth in your home, always and everywhere

⚙ **PWM PUMP AUTOMATICALLY MANAGED BY THE ELECTRONIC CARD**
SIMPLE: Relax, the performance of your system is self-adjusting

≡ **NEW ELECTRONICS FOR CONNECTION TO THE PLANT'S EXPANSION CARD**
FLEXIBLE: Maximum flexibility in the management of comfort in the rooms

📱 **HOME CONTROL SOLUTION**
INNOVATIVE: Always in contact with your stove, even when you are away from home

🔔 **SELF-CLEANING BRAZIER**
CONVENIENT: your stove cleans itself

💧 **OPTIMISED COMBUSTION**
EFFICIENT: Reduces the waiting time for relighting, ensuring optimal combustion


PR20

Pellet boiler with ash extractor

Evolution
line

A⁺ | 20,0 kW-N | 20,0 kW-H₂O | 573 m³

CHARACTERISTICS

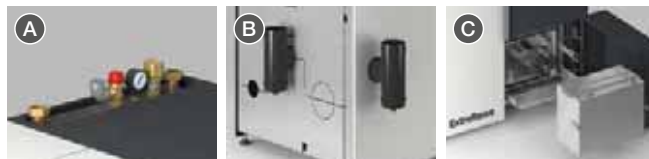

- A** Hydraulic connections at the top
- B** Output smoke outlet possibilities:
 - rear, left lateral
 - Air relief valve
 - Minimum pellet tank level probe
 - Combustion chamber in thick steel
 - Combustion chamber probe
 - Door fire and brazier in cast iron
 - Thermal and pressure safety
 - Shell and tube exchanger (automatic cleaning)
 - Front pellet tank feeding
 - Expansion tank
 - Wheels to facilitate movement
 - Safety valve 3 bar
 - **Innovative adaptive system to adjust and even the combustion air inlet**
- C** Ash extractor

TECHNICAL DATA

Nominal power (min-max)
5,7 - 20,0 kW-N

Power given back to water (min-max)
5,7 - 20,0 kW-H₂O

Efficiency (min-max)
88,4 - 92,4 %

Hourly consumption (min-max)
1,4 - 4,6 kg/h

Dimensions (LxHxD)
822 x 1398 x 817 mm

Net weight
310 kg


Fumes flue diameter (Ø)
100 mm B/LH side

Tank total capacity
~75 kg / ~119 ℓ

Power absorption (min-max)
60 - 65 W

Operating pressure (bar)
3 bar

TECHNOLOGY

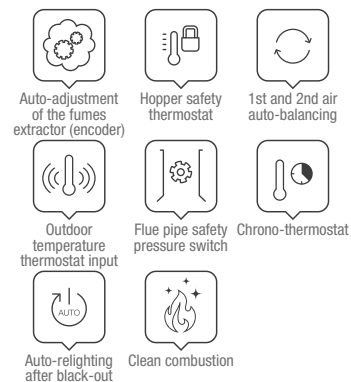

ECODESIGN



COLOUR CHOICES

High temperature painted steel covering



Light grey / Dark grey

STANDARD EQUIPMENT



DISPLAY BLACK MASK

Display Black Mask with integrated Wi-Fi (App "Total Control 2.0")



PLANT EXPANSION CARD KIT

OPTIONAL

Automatic loading pellet stocking tank
Automatic pellet loading kit 330 €
Automatic pellet loading kit 660 €
Extension module 180 €
Extension module 270 €

Download
Technical Sheet



SCAN ME

PR30

Pellet boiler with ash extractor

Evolution
line

A⁺ | 30,0 kW-N | 30,0 kW-H₂O | 860 m³

CHARACTERISTICS



- A** Hydraulic connections at the top
- B** Output smoke outlet possibilities:
 - rear, left lateral
 - Air relief valve
 - Minimum pellet tank level probe
 - Combustion chamber in thick steel
 - Combustion chamber probe
 - Door fire and brazier in cast iron
 - Thermal and pressure safety
 - Shell and tube exchanger (automatic cleaning)
 - Front pellet tank feeding
 - Expansion tank
 - Wheels to facilitate movement
 - Safety valve 3 bar
 - **Innovative adaptive system to adjust and even the combustion air inlet**
- C** Ash extractor

TECHNICAL DATA

Nominal power (min-max)
8,9 - 30,0 kW-N

Power given back to water (min-max)
8,9 - 30,0 kW-H₂O

Efficiency (min-max)
92,7 - 92,4 %

Hourly consumption (min-max)
2,0 - 6,8 kg/h

Dimensions (LxHxD)
892 x 1398 x 817 mm

Net weight
325 kg


Fumes flue diameter (Ø)
120 mm B/LH side

Tank total capacity
~75 kg / ~119 ℓ

Power absorption (min-max)
70 - 85 W

Operating pressure (bar)
3 bar

TECHNOLOGY

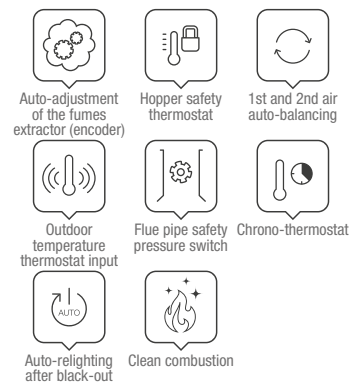

ECODESIGN



COLOUR CHOICES

High temperature painted steel covering



Light grey / Dark grey

STANDARD EQUIPMENT



DISPLAY BLACK MASK

Display Black Mask with integrated Wi-Fi (App "Total Control 2.0")



PLANT EXPANSION CARD KIT


OPTIONAL

Automatic loading pellet stocking tank
Automatic pellet loading kit 330 ℓ
Automatic pellet loading kit 660 ℓ
Extension module 180 ℓ
Extension module 270 ℓ

Download
Technical Sheet



SCAN ME



IT IS IMPORTANT TO SEEK THE GUIDANCE OF A QUALIFIED TECHNICIAN WHO IS ABLE TO RECOMMEND THE MOST SUITABLE TYPE OF BOILER OR HEATING DEVICE.

By way of providing generic information, we highlight below the main information one must have in order to make an informed decision when choosing an appliance:

- Thermal requirements of the home
- Type of existing heating system: radiators, fan coil units, or radiant panels
- Type of distribution system: one-pipe, two-pipe or manifolds
- Indication of whether, in addition to heating, the boiler is also intended for the production of domestic hot water
- Any set-up for or installation of thermal solar collectors
- Most suitable type of storage: DHW storage tank or puffer

Accordingly, it is important to seek the guidance of a qualified technician who is able to perform a precise analysis of the system, provide explanations to any questions, including regulation requirements for installation, and recommend the most suitable type of boiler.

A correctly designed therefore guarantees:

- complete safety of one's home
- maximum comfort
- high yield of heat generator
- maximum savings
- less wear to the parts and therefore longer service life of the appliance





Control Solution

Tecnologia, Comfort e Risparmio

Discover the innovative solutions to manage the comfort of your home at best and in utter convenience thanks to your pellet product.

ACCESSORY



THE INSTALLATION EXPANSION BOARD

optimises functioning of the appliance by means of appropriate configurations, reducing consumption and extending the working life of the product.

Thermal energy storage tanks

Wood or pellet boilers

Pellet stocking tank



**ALWAYS IN CONTACT
WITH YOUR STOVE**



Total Control 3.0

ACCESSORY APP

WIFI MODULE GREY LABEL

Compatible with models introduced from 2022



Total Control 2.0

ACCESSORY APP

WIFI MODULE BLACK LABEL

Compatible with models introduced from 2018



Total Control

ACCESSORY APP

WIFI MODULE WHITE LABEL

Compatible with models introduced up to 2017



Total Control 2.0


Display Balck Mask

New display Black Mask with Wi-Fi connection integrated allowing a remote management with the new App "Total Control 2.0"





Glass cleaning system
A system of pre-heated air which removes any deposit from the fire-door glass.



Extractable burn pot for easy cleaning
The burn pot's system of construction allows easy extraction for quick and complete cleaning.

PELLET



Auto-adjustment of the fumes extractor (encoder)
It keeps the RPM of the fumes motor constant, to ensure correct combustion of the product.

WOOD-BURNING




Hearth in Nordiker
La Nordica-Extraflame uses a special material called Nordiker for the production of hearth walls refractories.



Post combustion
The combustion system developed by La Nordica-Extraflame allows, due to a secondary/tertiary air system, a post combustion which significantly reduces emissions.




Hopper safety thermostat
Ensure always high safety standard, preventing the overheating of the product in case of anomaly.



1st and 2nd air auto-balancing
Primary and secondary air electronically balanced for an optimal combustion and thermal efficiency.



Outdoor temperature thermostat input
The product interfaces with room temperature control devices (thermostat or contacts) to achieve the selected temperature in every room.



Doors in cast iron
The high-quality cast-iron doors are made to last and ensure perfect sealing at all times.



Automatic safety device
It is a safety device created to quickly reduce water temperature, according to rules in force. DSA valve not included.



Air-tight seal test at 50 Pa (100% of the products)
All the air-tight products, or even those that have some "air-tight" components (like the hopper), are tested under high pressure at the end of the production line to ensure their safety and optimal performance.



Flue pipe safety pressure switch
Checks the correct evacuation of the fumes and, in case of need, locks the loading of pellets, to avoid problems on the generator.



Chrono-thermostat
Chronothermostat provided with temperature control divided in four daily slots for an optimal rooms management.



Glass cleaning system
A system of pre-heated air which removes any deposit from the fire-door glass.



Direct outdoor air intake (BBC)
Air intake system which draws fresh air from outside directly into the adjust system combustion regulation of the firebox of the appliance.



Auto-relighting after black-out
Following a black out the appliance automatically re-starts after having carried out the scheduled auto-control.



Room temp. thermostat
The room probe optimizes comfort and lowers noticeably the consumption.



Clean combustion
Increases the combustion efficiency and the duration of parts subject to wear duration reducing at the same time the ordinary brazier cleaning.



Outdoor air intake (ASC)
A particular connection system which allows to introduce air from the outside into the pre-heated environment around the fire-box.



Radiant system (PRS)
High efficiency Heat exchanger system

GENERAL PRODUCTS TABLE OF CONTENTS

Page no.	Article description	Finish Colour	DM186	Conto termico 2.0 (Coefficiente premiante)	Flamme Verte	DTA	BlmSchV	15a B-VG	Ecodesign
PRESTIGE LINE									
10	ALASKA	GLAZED BLACK	★★★★★	1,5	7★		✓	✓	✓
19	ANGELA EVO	WHITE BLACK	★★★★	1,5	7★	✓	✓	✓	✓
24	ANGELA PLUS EVO	WHITE BLACK	★★★★	1,5	7★	✓	✓	✓	✓
16	ANGY	WHITE BRONZE BLACK	★★★★	1,5	7★	✓		✓	✓
5	DANTE	MATTE BLACK	★★★★	1,2	7★		✓	✓	✓
6	DANTE CON PORTALEGNA	MATTE BLACK	★★★★	1,2	7★		✓	✓	✓
22	DEBBY	WHITE BLACK NATURAL STONE	★★★★	1,5	7★		✓	✓	✓
27	DEBBY PLUS EVO	WHITE BLACK NATURAL STONE	★★★★	1,5	7★		✓	✓	✓
26	GABRIELLA PLUS	WHITE BRONZE NATURAL STONE	★★★★	1,5	7★	✓	✓	✓	✓
18	ILARY	WHITE BLACK	★★★★	1,5	7★	✓	✓	✓	✓
25	ILARY PLUS	WHITE BLACK	★★★★	1,5	7★	✓	✓	✓	✓
13	LINA TOP	BLACK	** Technical data may be subject to changes, approval pending						
2	LIU'	NATURAL STONE	★★★★	1,5	7★		✓	✓	✓
9	MILLY	WHITE INFINITY BURGUNDY	★★★★		7★		✓	✓	✓
17	MIRKA	BLACK NATURAL STONE TORTORA	★★★★★	1,5	7★		✓	✓	✓
23	MIRKA PLUS	BLACK NATURAL STONE TORTORA	★★★★★	1,5	7★		✓	✓	✓
15	MOIRA EVO	WHITE BLACK	★★★★	1,5	7★	✓	✓	✓	✓
11	MONOBLOCCO 90PA		★★★★★	1,5	7★		✓	✓	✓
7	NOVA FORNO	MATT WHITE BURGUNDY	★★★★★	1,5	7★		✓	✓	✓
8	NOVA FORNO STEEL	ANTHRACITE BLACK PANNA	** Technical data may be subject to changes, approval pending						
21	PAMELA CRYSTAL - BLSC	CRYSTAL BLSC	★★★★	1,5	7★	✓	✓	✓	✓
20	PAMELA STEEL	BRONZE TORTORA	★★★★	1,5	7★	✓	✓	✓	✓
30	ROSANNA IDRO	IVORY BURGUNDY BRONZE	★★★★	1,5	7★		✓	✓	✓

GENERAL PRODUCTS TABLE OF CONTENTS

Page no.	Article description	Finish Colour	DM186	Conto termico 2.0 (Coefficiente premiante)	Flamme Verte	DTA	BlmSchV	15a B-VG	Ecodesign
14	SABRY	IVORY BRONZE BLACK	★★★★	1,5	7★		✓	✓	✓
28	SHARON PLUS	CRYSTAL NATURAL STONE	★★★★	1,5	7★	✓	✓	✓	✓
29	SHARON PLUS STEEL	BLACK	★★★★	1,5	7★	✓	✓	✓	✓
3	TAHITI	ANTHRACITE BLACK	★★★★		7★		✓	✓	✓
4	TAHITI EPS	ANTHRACITE BLACK	★★★★	1,5	7★		✓	✓	✓
EVOLUTION LINE									
46	EVELYNE IDRO 2.0	WHITE GREY TORTORA	★★★★	1,5	7★		✓	✓	✓
45	FIANDRA IDRO EVO *	PANNA	★★★★	1,5	7★		✓	✓	✓
44	GUENDA IDRO	IVORY BRONZE TORTORA	★★★★	1,5	7★		✓	✓	✓
47	ISIDORA IDRO H16	WHITE BURGUNDY BRIGHT TORTORA	★★★★	1,5	7★		✓	✓	✓
48	ISIDORA IDRO H20	IVORY BURGUNDY	★★★★	1,5	7★		✓	✓	✓
49	ISIDORA IDRO H23 5.0	WHITE BURGUNDY				** Technical data may be subject to changes, approval pending			
35	KATIA 11	WHITE BRONZE TORTORA	★★★★	1,5	7★	✓	✓	✓	✓
34	KATIA 9	WHITE BRONZE TORTORA	★★★★	1,5	7★	✓	✓	✓	✓
33	MIETTA EVO	WHITE BURGUNDY	★★★★	1,5	7★	✓	✓	✓	✓
37	NORIS	WHITE BRONZE TORTORA	★★★★	1,5	7★	✓	✓	✓	✓
38	NORIS LUX	WHITE TORTORA	★★★★	1,5	7★	✓	✓	✓	✓
40	NORIS PLUS	WHITE BRONZE TORTORA	★★★★	1,5	7★	✓	✓	✓	✓
41	NORIS PLUS LUX	WHITE TORTORA	★★★★	1,5	7★	✓	✓	✓	✓
51	PR20	LIGHT GREY / DARK GREY	★★★★★	1,5	7★		✓	✓	✓
52	PR30	LIGHT GREY / DARK GREY	★★★★★	1,5	7★		✓	✓	✓
36	SINFONY	WHITE BRIGHT TORTORA	★★★★	1,5	7★	✓	✓	✓	✓
42	TERRY PLUS	WHITE BURGUNDY BRIGHT TORTORA	★★★★	1,5	7★	✓	✓	✓	✓

* While stocks last

CERTIFICATES



Italian Regulation for the Environmental Certificate release of domestic solid fuels biomass room heaters (Classification from 1 up to 5 stars).

BlmSchV

German regulations on controlling emissions.



Only for Italy: the Ministerial Decree 28/12/12, better known as “Conto Termino”, allows a specific incentive in case of replacement of old appliances by new ones with certain characteristics

15a B-VG

Compliance with article 15 of the Austrian federal constitutional law on environmental protection measures.



French trademark of the ADEME agency for the environment and the energy. The products “Flamme Verte” approved guarantee the best high energy performances and respect for the environment.

ECODESIGN

European certification defining the ecodesign guidelines for biomass products.



Certification issued by the French Scientific and Technical Building Centre – CSTB – for watertight devices tested in watertight installation conditions.

MFB

Only for Germany: The products is ready to be connected to a multiply chimney connection , just when the installation is made in accordance with requirements of the regional and national standards, and when observed the norms DIN EN 13384-2, DIN V 1816-1, DIN 18896 and MFeuV-2007 (Muster-Feuerungsverordnung), and that the district chimney sweeper has checked and approved the correct installation.



Certification issued by the German Federal Office for Economics and Export Control to promote the efficient use of biomass energy.

MAKING THE RIGHT CHOICE - THINK OF THE ENVIRONMENT, EVEN IN YOUR OWN HOME

When you decide to buy a wood burning range, a fireplace, a boiler or a wood or pellet burning stove, a series of factors influence your choice. La Nordica-Extraflame has provided this tool to help you find what you need.

1 Flue Pipe

Should be considered as the main element for smoke disposal. It must be built with material able to resist to high temperature, better with a circular shape, and 4 meters as minimal height without bends.

2 Connection Pipe flue


Appliance flue connection pipe must be shortest, with few horizontal parts as possible and with the same diameter of the collar pipe appliance connection.

3 Air Intake

It should be checked as correct appliance installation if do exist an external air intake big enough to offer a whole and efficient combustion.


4 Chimney

Put on the top, it must have the same internal section of the chimneypot, while the exit one must be twice compared to the flue pipe diameter to guarantee the residual combustion disposals and protecting against environment.



5 Canalization

It is always important to assess the maximum air-ductable distances of the installed product.



6 Thermo products

By choosing what thermo product to install, specific individual needs have to be considered in addition to a meticulous assess of the global thermal power needed by the heating system and of the installation place.



7 Heatable m³

The data is indicative. For the generator to be sized correctly, contact a skilled technician/designer. The total volume to heat, the thermal building insulation grade, the sun exposure and the climatic zone have to be determined in order to make the best choice about the fireplace or stove to install. This is the only way to quantify the environmental needed heat.

Nominal power kW	m³ to heat
5 - 8	150 - 200 circa
8 - 12	200 - 300 circa
12 - 20	300 - 500 circa

Referred to the need of 30 kcal/h x m³

LIST OF FUNCTIONS OF PELLET PRODUCTS

EASY SETUP

The *Easy Setup* function allows the user to easily configure the stove so that it can operate as efficiently as possible with most types of pellets available on the market. It ensures optimum performance in terms of yield for each type of pellet.

EASY CONTROL

In order to function, a stove must be connected to a system that has a flue and an external air inlet. Not all systems are the same as they depend on the physical characteristics of the building in which they are used: consequently, the operating conditions of the stove can vary considerably depending on the system itself. Thanks to the Easy Control function, the stove operates under optimal conditions even in difficult situations, minimising unwanted effects such as condensation and poor combustion, and it can also help to keep the glass of the stove door cleaner.

FLOW PERFORMANCE CONTROL (FPC)

The FPC system keeps the supply of combustion air constant at all times, thus ensuring that combustion characteristics remain the same. In this way, maximum stove efficiency is achieved even when the system conditions (stove+flue pipe) change.

SELF CONTROL

All Extraflame products use an automatic power management system (maximum power or minimum power) that allows the stove to reach the room temperature set by the user. Therefore, with the Self Control management mode, the desired temperature is reached in the shortest possible time.

AUTOMATIC

Automatic is the evolution of the Self Control function. The stove accurately and continuously regulates the power output in order to reach and maintain the temperature set by the user. This translates into improved thermal and acoustic comfort and reduced consumption.

AIR ZONE CONTROL (AZC)

The Air Zone Control feature is exclusive to products with a dedicated motor for ducting. The AZC function ensures maximum heat output to the ducting when the room in which the stove is installed has reached the set temperature. Therefore, in this mode, maximum comfort is achieved in the ducted area and consumption is significantly reduced when the set temperature is reached in the main room.

PRO AIR SETUP

New setup for ventilation mappings. It allows the user to choose between 4 different room ventilation modes:
Off = Fan off. N.B. Mode only available for models that have this setting option.
Quiet = Fan speed is reduced for noise reduction (compared to Regular).
Regular = Default configuration.
Boost = Fan speed is increased compared to Regular in order to maximise ventilation air flow.

INTEGRAZIONE DOMOTICA "ALEXA"

With this extra feature, the stove can be controlled via the "Alexa" (Amazon) voice assistant. This operation requires an Internet connection + the new Total Control 3.0 app: therefore, the product must have the "Grey" module or have this function integrated in the board/display set up for the 3.0. app.

NOTE

- Due to printing reasons the reproduction of colours has to be considered only indicative.
- The fuel quantity (weight) inside the hopper and the hour consumption can change depending on the type of pellet which is used.
- All the figures were measured using approved pellets in compliance with EN ISO 17225-2.
- Facing tones and characteristics are subject to slight variations because they are natural products.
- The manufacturer reserves the right to change the products without any previous notice.
- The La Nordica-Extraflame products can be covered by industrial property rights (such as patents, designs and trademarks) owned by La Nordica-Extraflame exclusively. It is strictly forbidden to violate these rights as for removing, cancelling or corrupting the rademarks impressed on the products and impressing others.
- m³ that can be heated: the data is indicative. For the generator to be sized correctly, contact a skilled technician/ designer.
- Before the purchase, ask your reseller all the information regarding the appliance. One must also bear in mind all laws and national, regional, provincial and town council Standards present in the country in which the appliance has been installed, as well as the instructions contained in this manual.
- The images contained in this document are for product illustration purposes only and do not represent indications for the performance or technical characteristics of the same.
- The data in the catalogue can be rounded off to the first decimal.
- La Nordica-Extraflame products are approved to work with 230V 50Hz power supply only. The use with different voltages and / or frequencies suply can compromise the functionality and safety of the products.

LEGEND

kW-N: Nominal thermal power (kW)

kW-H₂O: Power given back to water (kW)

m³: Heatable m³ (30 kcal/h x m³)

%: Efficiency (%)

kg-l: Feed box Total capacity (kg-l)

kg/h: Hourly consumption (kg/h)

Ø mm: Smoke outlet diameter (mm)

T = Top

B = Back

RH side = Right side


LH side = Left side

Dim. LxHxD: Dimensions LxHxD (mm)

kg: Net weight (kg)

W: Electric consumption (W)

bar: Working pressure (bar)

 **Air-tight:** Air-tight combustion chamber and tank: technology and innovation at the service of your safety

ENERGY LABEL



As of 1st January 2018 the Energy Labelling Regulation came into force also for all the biomass heating appliances, both roomheater appliances and appliances designed to heat the water for central heating and domestic hot water.

This directive, in accordance with the regulations of the European Union, will assign an Energy Efficiency Class (from G up to A++) providing the buyers with information about the consumption and the efficiency

NOTES



FEELING COSY AT HOME
A natural choice

 **NORDICA**[®]
Extraflame
Warms up your life.



Warms up your life.



La Nordica S.p.A. (Wood products)

Via Summano, 104 • 36030 Montecchio Precalcino - Vicenza - Italy

Tel. +39 0445 804000

info@lanordica.com

Extraflame S.p.A. (Pellet products)

Via dell'Artigianato, 12 • 36030 Montecchio Precalcino - Vicenza - Italy

Tel. +39 0445 865911

info@extraflame.it

www.lanordica-extraflame.com

9300134-001

